120

QC

\*120\*

Quality Control

QC6- Inspect dimensions to drawing

Memo

							DQA: Date:									
NCR: Yes / No							WORK ORDER NON-CONFORMANCE / UPDATE									
						· · · · · · · · · · · · · · · · · · ·						QA Closed:	Date	:: 		
Work Ord	or.						DISPOSITION				AGAINST D	EPARTMENT,	PROCESS			
WOIN OIG	٠,,			<u> </u>			Rework	ı		Skid-tube	Crosstube	7	Water Jet	Engineering		
Part N	J۸						Scrap			Machining	Small Fab	Pro	d. Eng. Coor.	Quality		
1 0111	•0.					ŀ	Use-as-is			noforming	Finishing		re/Packaging	Other		
NCR No.					Work Order Update			Large Fab	Composite	1	Supplier					
							'		v L							
Root	Descrip			ript	on of work order update	ı	nitial	Act	tion	Sign &						
Cause		Date	Step	Qty		or	Non-conformance	Ch	ief Eng				Verification	QC Inspector		
oc/Data					·									1		
quip/Tooling							y •						;			
perator				  -  -			1		!					` <b> </b>		
1aterial							:							,		
etup						r										
ther										-						
rocess																
upplier							,			•				. [		
raining							T.									
napproved					<u> </u>	i.							<u> </u>			
								AUL	T CATE	GORY						
Landi	_	1			_	_	General	_	1 .	•	Γ	· ·		<b>-</b>		
į		Bending				end	<u> </u>	Grain		<u> </u> _	Ovalized		Pressure/Forced			
		Centre Not Concentric to O/S			_	OM/Route	<u> </u>	Hardwa		-	Over/Under	_	Temperature/Cure			
	Cracks			_	roken/Damaged	<u> </u>	4	on Incomplete		Part Incorre	<u> </u>	Weld .				
	Crushed/Crimped.			—1	urrs	L	4	ions Incomplete/I	Unclear	Part Lost/Mi	issing [	Wrong Stock Pulled				
	Cuffs					ontamination	_	Mainte		<u> </u>	Part Moved	4/				
	Heat Treat			-	_	ountersink	_	Mislabe		 	Positioned V	_	Joshan			
	$\overline{}$	Inspection		Tube	⊢	_	ut Too Short	$\vdash$	Misread	1	L	Power Loss/	Surge	Other		
	_	Ripples in			<u> </u>		rill Holes	$\vdash$	Offset	Calibratia			*			
	$\dashv$	Torque W		xtrusion	' <b> </b>	_	Prawing	$\vdash$	-	Calibration						
		Turning Se		_	-	_	inish	$\vdash$	1	Sequence						
	Wave/Twist in Tube			1	- 11	olio	1	JUutside	Dimensions			,				

H:/FORMS/Quality Assurance\approved QA/NCRWO Rev G

Wave/Twist in Tube

Work Order I	D 100144
--------------	----------

### \*100144\*

Page 2

Thursday, April 18, 2013 10:35:58 AM Item ID: D3997-41 Accept \*N900040100\* Setup Start **Revision ID:** Item Name: Placard Stop **Start Date:** 4/18/2013 **Start Oty: 10.00** \*10\* Cust Item ID: Required Date: 4/25/2013 Req'd Oty: 10.00 \*10\* **Customer:** Reference: Run **Approvals:** Process Plan: Date:\_\_\_\_ Tooling: Date: Stop Date: \_\_\_\_\_ **SPC (Y/N):** Date: Sequence ID/ Operation Set Up/ Tool ID Tool # Plan Reject Reject Accept Insp. Work Center ID Description **Run Hours** Qty Code Qty Number Stamp 130 Identify as per dwg & Stock Location: 0.00 \*130\* Packaging 0.00 Memo Packaging 140 QC21- Final Inspection - Work Order Release 0.00 \*140\* QC 0.00 Memo Quality Control

										DQA:	Date:	
NCR:	Yes	/ No				WORK ORDER NON-C	ONFO	RMANCE / UP	DATE	OA Classide	Data	
· · · · · · · · · · · · · · · · · · ·	-					1	<del></del>			QA Closed:	Date:	
Work Orde	er.					DISPOSITION			AGAINST DE	PARTMENT	/PROCESS	
Work Oral						Rework	1	Skid-tube	Crosstube		Water Jet	Engineering
Part N	No.					Scrap	1	Machining	Small Fab	Pro	d. Eng. Coor.	Quality
	_					Use-as-is	l l <sub>The</sub>	rmoforming	Finishing	-1	re/Packaging	Other
NCR I	No.					Work Order Update	1	Large Fab	Composite	1	Supplier	1   -
	_						'		· • • • • • • • • • • • • • • • • • • •			
Root					Descri	ption of work order update	Initial	Ac	tion	Sign &		
Cause		Date	Step	Qty		or Non-conformance	Chief Er	ng Desc	ription	Date	Verification	QC Inspector
Doc/Data												
Equip/Tooling						,						
Operator												
Material												
Setup												
Other				:		1						
Process						ſ						
Supplier	Ш							:				
Training	Ш					1						,
Unapproved												
						F	AULT CA	regory				
Landi					<b></b>	General	<del></del> 1	·	_	7		7
	-	Bending				Bend	Grain			Ovalized	_	Pressure/Forced
		Centre No	ot Concer	ntric to C	)/S	BOM/Route	Hard	ware		Over/Under	tolerance	Temperature/Cure

Inspection Incomplete

Maintenance

Out of Calibration

Out of Sequence

Outside Dimensions

Mislabeled

Misread

Offset

Instructions Incomplete/Unclear

Part Incorrect

Part Moved

Part Lost/Missing

Positioned Wrong

Power Loss/Surge

Weld

Other

Wrong Stock Pulled

Broken/Damaged

Contamination

Countersink

Cut Too Short

Drill Holes

Drawing

Finish Folio

Burrs

H:/FORMS/Quality Assurance\approved QA/NCRWO Rev G

Turning Sequence

Wave/Twist in Tube

Ripples in Bend

Cracks

Cuffs

Heat Treat

Crushed/Crimped.

Inspection Strip in Tube

Torque Waves in Extrusion

Picklist Print

Thursday, April 18, 2013 10:35:58 AM

Work Order ID:

100144

Parent Item:

D3997-41

Parent Item Name:

Placard

**Start Date: 4/18/2013** 

Required Date: 4/25/2013

Page 1

Start Qty: 10.00

Required Qty: 10.00

**Comments:** 

IPP rev A 10.01.13 new issue Prelim EC verified by:DD

Component Item ID/ Item Name	Replacement Item ID	Mfg/ Purch	Bin Item	Primary Location	Last Location	Route Seq ID	Unit of Measure	Qty on Hand	Qty per Kit	Total Qty	Qty Issued	Date Issued	Status
D3997-41P		Purchased	No		<del></del>		Each	0.0000		10			****

Placard

/43/4/pe (10)


	· · · · · · · · · · · · · · · · · · ·										DQA:	Da	te:		
NCR: Yes / No							WORK ORDER NON-C	WORK ORDER NON-CONFORMANCE / UPDATE  QA Closed: Date:							
Work Ord	er.						DISPOSITION		AGAINST DEPARTMENT/PROCESS						
Part No						Rework Scrap Use-as-is Work Order Update		f Therm	Skid-tube Crosstube  Machining Small Fab  noforming Finishing  Large Fab Composite	Rec/Store/Packaging ;			Engineering Quality Other		
Root Cause		Date	Step	Qty	Des		otion of work order update	1	nitial Action nief Eng Description		Sign & Date	Verificatio	n	QC Inspector	
oc/Data quip/Tooling perator laterial etup ther rocess upplier raining napproved															
							, F/	AUL	T CATE	GORY					
Land	ding Gear  Bending Centre Not Concentric to O/S Cracks Crushed/Crimped Cuffs Heat Treat				General Bend BOM/Route Broken/Damaged Burrs Contamination Countersink		Instruct Mainte Mislabe	on Incomplete ions Incomplete/Unclear enance eled	Ovalized Over/Under tolerance Part Incorrect Part Lost/Missing Part Moved Positioned Wrong			Pressure/Forced Temperature/Cure Weld Wrong Stock Pulled			
		Inspection Ripples in	Bend				Cut Too Short Drill Holes		Misread Offset	_	Power Loss,	/Surge		Other	
	Torque Waves in Extrusion Turning Sequence				n		Drawing Finish		4	Calibration Sequence					

Outside Dimensions

H:/FORMS/Quality Assurance\approved QA/NCRWO Rev G

Wave/Twist in Tube

Folio

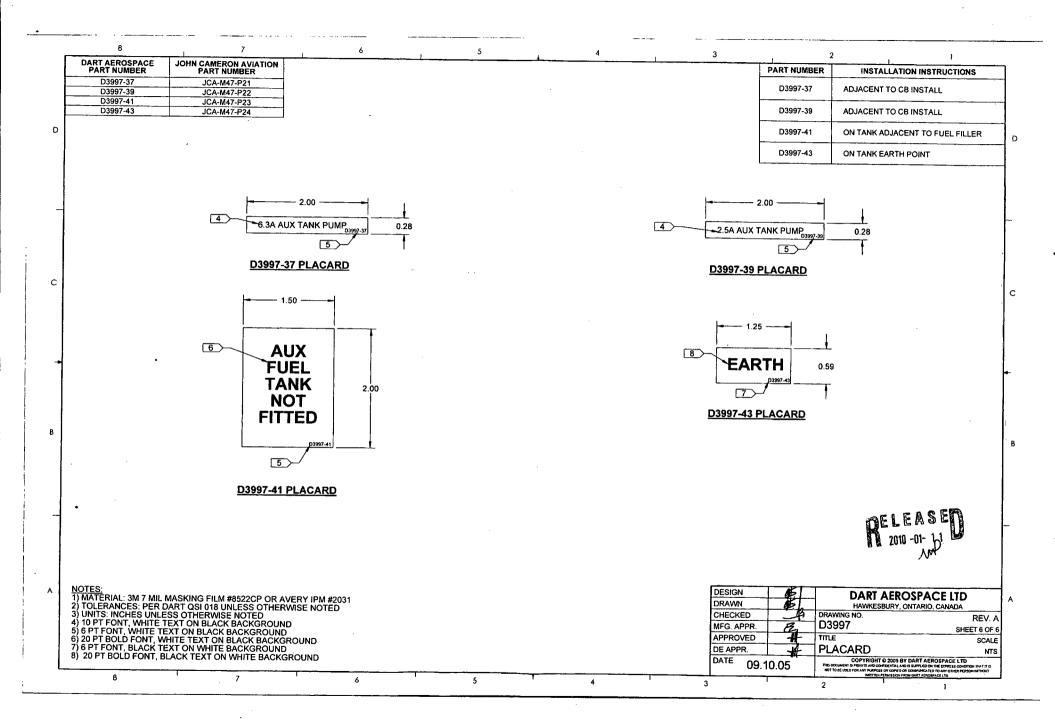

										DQA.	Date.	
NCR:	Yes / No		•		WORK ORDER NON-	COI	NFORN	/ANCE / UPDA	ATE	QA Closed:	Date:	
	<u> </u>		•	· · · · · · · · · · · · · · · · · · ·	DISPOSITION	DISPOSITION			AGAINST DE			
Work Orde	er:				_	_				1		n
Part No.				<del></del>	Rework Scrap Use-as-is			Skid-tube Crosstube  Machining Small Fab  Thermoforming Finishing			Water Jet d. Eng. Coor. re/Packaging	Engineering Quality Other
NCR f	No				Work Order Update			Large Fab	Composite		Supplier	
Root				Descri	ption of work order update	T	Initial	Actio	n	Sign &		
Cause	Date	Step	Qty	(	or Non-conformance	Ct	nief Eng	Descrip	tion	Date	Verification	QC Inspector
Doc/Data					1		,					
Equip/Tooling					· ·							
Operator			1									
Material												
Setup					I					,		
Other											,	
Process					<i>}</i>						·	
Supplier			. 1		T							
Training					,						,	-
Unapproved									· · · · · · · · · · · · · · · · · · ·			
-						AUI	LT CATE	GORY				
Landi	ng Gear			_	General		٦			۱		
	Bending			, <b> </b>	Bend	$\vdash$	Grain			Ovalized		Pressure/Forced
	<b>⊢</b> ⊣	Not Conce	ntric to C	D/S	BOM/Route	-	Hardwa		<u> </u>	Over/Under	<del>                                     </del>	Temperature/Cure
	Cracks				Broken/Damaged	$\vdash$	4	on Incomplete	.	Part Incorre	<u> </u>	Weld
	⊢	/Crimped		<b> </b>	Burrs	$\vdash$	4	ions Incomplete/Un	clear	Part Lost/M	_	Wrong Stock Pulled
	Cuffs			<u> </u>	Contamination	$\vdash$	Mainte		<b> </b>	Part Moved		
	Heat Tre				Countersink	$\vdash$	Mislabe		ļ	Positioned \		٦٠٠٠
!	Inspection Strip in Tube			Cut Too Short		Misread			Power Loss,	'Surge	Other	

Offset

Out of Calibration

Out of Sequence

Outside Dimensions

H:/FORMS/Quality Assurance\approved QA/NCRWO Rev G

Ripples in Bend

Turning Sequence

Wave/Twist in Tube

Torque Waves in Extrusion

Drill Holes

Drawing

Finișh Folio

Purchase Order #: Packing Slip #: Part #:  Description: D 3997 - 31 P × 10 D 3997 - 32PX D 3997 - 32PX D 3997 - 19 × 10 D 3997 - 23P × 10 D 3997 - 19 × 10 D 3997 - 23P × 10 D 3997 - 19 × 10 D 3997 - 23P × 10 D 3997 - 19 × 10 D 3997 - 23P × 10 D 3997 - 19 × 10 D 3997 - 23P × 10 D 3997 - 19 × 10 D 3997 - 23P × 10 D 399
Purchase Order #: Packing Slip #: Part#: Set dex  Description: D 3997-31 P × 10 D3997-35 P × 10 D 3997-10 × 10 D3997-55 N D D 3997-10 × 10 D3997-15 × 10 D 3997-10 × 10 D3997-15 × 10 D 3997-10 × 10 D3997-10 × 10 D
Purchase Order #: Packing Slip #: Part#: Serial #:  Description: D 2997-31 P x 10 D 3997-37PX D 2997-15 X 10 D 3997-19 X 10 D 3997-15 X 10 D 3997-19 X 10 D 3997-10 X 10 D
Description: D 3997-31 P x 10 Quantity: D3997-35 P x 10 D3997-37 P x 12 D3997-25 P x 10 D3997-10 x 12 D3997-25 P x 10
Description: D 3097-31 P × 10 Quantity:  D3997-35P × 10 D3997-37PX D3997-10 XX  D3997-15 × 10 D3997-10 × 12 D3997-23P × 10 D3997-41P XX  Certification:  We hereby certify that:  1. The above the listed items were manufactured, repaired and/or inspected in accordance with applicable drawings and/or specifications;  2. All work was accomplished in accordance with the Dart Aerospace Purchase Order:  3. Results of all inspections, chemical or physical tests, as well as other evidence, which shows the acceptability of raw materials, parts and/or assembly components are on file and available for inspection at any time.
D3997 - 358 × 10 . D3997 - 378× 2 D3997 - 258 × 10 . D3997 - 10 × 10 D3997 - 10 D3997 - 10 × 1
Certification:  We hereby certify that:  1. The above the listed items were manufactured, repaired and/or inspected in accordance with applicable drawings and/or specifications;  2. All work was accomplished in accordance with the Dart Aerospace Purchase Order:  3. Results of all inspections, chemical or physical tests, as well as other evidence, which shows the acceptability of raw materials, parts and/or assembly components are on file and available for inspection at any time.
<ol> <li>We hereby certify that:</li> <li>The above the listed items were manufactured, repaired and/or inspected in accordance with applicable drawings and/or specifications;</li> <li>All work was accomplished in accordance with the Dart Aerospace Purchase Order:</li> <li>Results of all inspections, chemical or physical tests, as well as other evidence, which shows the acceptability of raw materials, parts and/or assembly components are on file and available for inspection at any time.</li> </ol>
<ol> <li>The above the listed items were manufactured, repaired and/or inspected in accordance with applicable drawings and/or specifications;</li> <li>All work was accomplished in accordance with the Dart Aerospace Purchase Order:</li> <li>Results of all inspections, chemical or physical tests, as well as other evidence, which shows the acceptability of raw materials, parts and/or assembly components are on file and available for inspection at any time.</li> </ol>
accordance with applicable drawings and/or specifications;  2. All work was accomplished in accordance with the Dart Aerospace Purchase Order:  3. Results of all inspections, chemical or physical tests, as well as other evidence, which shows the acceptability of raw materials, parts and/or assembly components are on file and available for inspection at any time.
accordance with applicable drawings and/or specifications;  2. All work was accomplished in accordance with the Dart Aerospace Purchase Order:  3. Results of all inspections, chemical or physical tests, as well as other evidence, which shows the acceptability of raw materials, parts and/or assembly components are on file and available for inspection at any time.
Purchase Order:  3. Results of all inspections, chemical or physical tests, as well as other evidence, which shows the acceptability of raw materials, parts and/or assembly components are on file and available for inspection at any time.
<ol> <li>Results of all inspections, chemical or physical tests, as well as other evidence, which shows the acceptability of raw materials, parts and/or assembly components are on file and available for inspection at any time.</li> </ol>
which shows the acceptability of raw materials, parts and/or assembly components are on file and available for inspection at any time.
components are on file and available for inspection at any time.
Authority:
Authority:
\ _ <b>^</b>
$\mathcal{S}_{\mathcal{M}}$
APPROVAL: KAREN STE. MARIEDATE:
Signature. Torento Me
Title: Project Coordinator April 24 2013.

Studio de Lettrage 210 Main Street W Hawkesbury, Ontario K6A 2H6

#### **INVOICE**

Invoice No.:

19942

Date:

04/25/2013

Ship Date:

Page:

Re: Order No.

WO9730

Sold to:

Dart Aerospace Ltd

1270 Aberdeen

Hawkesbury, Ontario K6A 1K7

Ship to: Dart Aerospace Ltd

Hawkesbury, Ontario

Business	No.:	82500 7651 RT	0001	The state of the same of the state of the st			
Item	No.	Unit	Quantity	Description	Tax	· * Unit Price `	** **Amount
Studio de		HST: #825007651F Tracking N	T0001	3M STICKER D3997-31P SET UP 3M STICKER D3997-35P SET UP 3M STICKER D3997-37P SET UP 3M STICKER D3997-1P SET UP 3M STICKER D3997-21P SET UP 3M STICKER D3997-21P SET UP 3M STICKER D3997-23P SET UP 3M STICKER D3997-41P SET UP 7M STICKER D3997-41P SET UP 8M STICKER D3997-41P		2.5000 50.0000 2.5000 50.0000 2.0833 50.0000 50.0000 50.0000 2.5000 50.0000 2.5000 50.0000	25.00 50.00 25.00 50.00 25.00 50.00 25.00 50.00 25.00 50.00 25.00 50.00 78.00
Commer		rracking r	TOTAL			Total Amount	678.00

## **3M**

#### **Product & Instruction Bulletin 8522**

Release I, Effective September 2008 See Bulletin Change Summary and end of Bulletin This Bulletin now includes Instruction Bulletin 4.23

## Scotchcal<sup>™</sup> Changeable Opaque Imaging Media

8522

### **Product Description**

# Recommended Types of Graphics and End Uses

#### For Thermal Inkjet Printing

This durable, 7 mil, opaque, changeable film is optimized for use with selected thermal inkjet printers and inks. Ink dries quickly on the film. When overlaminated, it is warranted for medium term, outdoor weatherable graphics, and long term indoor graphics.

When constructed and used as described in this Bulletin, these types of graphics and end uses may be warranted by the  $3M^{\infty}$  MCS Warranty. Please read the entire Bulletin for details.

- First surface images (the image is on top of the film) for opaque posters and signs, including:
  - Graphics for vans, personal vehicles, trucks and buses
  - Novelty posters
  - Retail and point-of-purchase displays
  - Information graphics such as maps and directories
  - Entertainment promotions in museums, zoos, parks, theatres, sports venues
  - Education and presentation graphics
  - Legal and courtroom exhibits
- For flat or simple curved surfaces, with or without rivets, used in vertical (± 10°) applications

#### **Limitations of End Uses**

3M specifically does not recommend or warrant the following uses, but please contact us to discuss your needs or recommend other products.

## Unsuitable End Uses for This Product

- Not for electronically cut individual letters and numbers
- Fleet applications in areas that use salt for winter road maintenance
- · Application to non-warranted substrates, including wallboard
- Applications subjected to gasoline vapors or spills
- Application to corrugated or highly irregular surfaces or sharply raised areas
- Graphics applied to stainless steel, including stainless steel vehicles
- On flat surfaces with rivets, tenting of 4 to 10 mm around rivets may be expected; rivets may be cut around to eliminate tenting.
- Graphics made for automotive Original Equipment Manufacturers (OEM); contact 3M Automotive Division at 1-800-328-1684 for alternatives.

#### **About Water-Based Inkjet Technology**

Standard inkjet technology is water based. Water-based chemistry is susceptible to the extremes of heat and humidity. This is a factor in most product constructions on the market. Read the Fabrication, Shelf Life and Storage sections in this Bulletin. Staying in the middle of these ranges always provides optimum performance.

#### **Compatible Products**

#### **3M Graphic Materials**

For complete details about graphic construction options, recommended uses and durability, refer to the Product Bulletin for the base film or substrate (media) you are using. See **3M Related Literature** at the end of this Bulletin.

This Bulletin provides details about the base film and construction options and warranty. Additional specific information about compatible products can be found in the Product and Instruction Bulletins listed in **3M Related Literature** at the end of this bulletin.

#### **3M Graphic Materials**

For complete details about graphic construction options, recommended uses and durability, refer to the Product Bulletin for the base film or substrate (media) you are using. See **3M Related Literature** at the end of this Bulletin.

#### Film

3M™ Scotchcal™ Opaque Imaging Media 8522

#### **Overlaminate**

- 3M<sup>™</sup> Scotchcal<sup>™</sup> Luster Overlaminate 8519
- 3M<sup>™</sup> Scotchcal<sup>™</sup> Matte Overlaminate 8520

#### **Printers and Inks**

HP Designjet Printers	HP Inks
<ul> <li>2500CP and 2000CP</li> <li>2800CP and 3800CP</li> <li>3500CP and 3000CP</li> <li>HP Designjet 5000 and 5500</li> </ul>	<ul> <li>Designjet CP Ink System UV (pigment-based)</li> <li>Designjet CP Inkjet System (imaging ink)</li> </ul>
• Z6100	HP 91 Vivera Ink System

Epson Printers	Epson Inks	
Stylus Pro 9500	Archival Inks	
<ul> <li>Stylus Pro 10000 printer</li> </ul>		
<ul> <li>Stylus Pro 10600 printer</li> </ul>		

#### **Characteristics**

These are typical values for unprocessed product; processing may change the values. Contact your 3M representative for a custom specification.

Characteristic	Description
Media	7 mil, white, opaque graphic film
Liner	Low-slippage, lay flat paper
Adhesive	Changeable, pressure sensitive
Thickness	Media with adhesive: 7.5 to 8 mil (nominal)
Warranted application substrates	See next page.
Application surfaces	Flat or simple curved surfaces, with or without rivets, used in vertical (± 10°) applications (no corrugations)
Application temperature range	28° to 110°F (-2° to 43°C) (air and surface)
Removable	For up to one year; see Warranty Information

Characteristic	Description
Warranted application substrates	Some substrates may "out-gas", resulting in tiny bubbles throughout the surface of the graphic. For maximum performance, be sure the substrate you select is properly cleaned and prepared as recommended by the manufacturer. See Instruction Bulletin 5.1 for additional information.
	Alodine (anodized aluminum)
	Automotive panels (automotive painted steel)
	Fruehauf (painted aluminum)
	FRP (fiberglass reinforced plywood)
	• Glass
	Imron® (polyurethane-painted metal panel)
	Acrylic
	Sintra ™ board
	Note: Use on any other substrate is strictly on a graphics manufacturer and customer test and approve basis. Test for both adhesion and removal characteristics. The plasticizer in some banner materials may migrate. This may cause the edge of the graphic to peel or lift off of the banner. For optimum performance, follow the guidelines in the section, Creating A Laminated Overlap, on page 4.

### Warranty Information

The warranty given in the Product Bulletin that is current at the time you purchased the film is the one that 3M will honor. The warranties in the following table(s), given in years, are for finished graphics exposed in a vertical exposure in the United States except the Desert Southwest. See the warranty sections following this table for additional information.

#### 3M<sup>™</sup> MCS<sup>™</sup> Warranty Durability for Finished Graphics

Construction (film and overlaminate on warranted substrate	HP Printers & Inks		Epson Printers & Inks		Removal
	Outdoor	Indoor	Outdoor	Indoor	
8522/8519	3 years	5 years	2 years	5 years	1 year without
8522/8520					chemical strippers or tools

#### Warranty and Limited Remedy

The following is made in lieu of all other express or implied warranties, including any implied warranty of **merchantability** or fitness for a particular purpose or implied warranty arising out of a course of dealing, custom or usage of trade: all 3M products are warranted to be free of defects in materials and manufacture at the time of shipment and to meet the specifications stated in this Product Bulletin. 3M will replace or refund the price of any 3M materials that do not meet this warranty within the specified time periods. These remedies are exclusive. In no case shall 3M be liable for any direct, indirect, or consequential damages, including any labor or non-3M materials charges.

See the Graphics Market Center Warranty Brochure, which gives the terms, additional limitations of the warranty, if any, and limitations of liability.

## **Graphic Construction Options**

#### **Opaque Graphics**

Opaque graphics made with imaging media 8522 require an overlaminate and an opaque substrate.

#### Viewer/Light Source



Overlaminate 8519, 8520 Adhesive on bottom

Imaging Media 8522 Image on top; adhesive on bottom

Opaque Substrate

#### **Fabrication**

Different combinations of shop temperature and humidity can affect the handling of the media, the protective finish and the printed graphic. For optimum performance, use the *middle* of each of these ranges whenever possible.

#### **Shop Temperature**

Acceptable: 60° to 95°F (15° to 35°C) Optimum: 65° to 73°F (18° to 23°C)

#### **Shop Humidity**

Acceptable: 20% to 80% Optimum: 45% to 60%

#### Condition the Media Before Use

These steps are especially important if you are operating outside the conditions recommended under Fabrication, above.

- Leave the media in its original packaging until you are ready to condition and use it.
- The day before you need it, remove the media from the box and remove the plastic.
  - Condition the media for 24 hours in the same environment as the printer.

### Printer Settings for Optimum Quality

Refer to your Hewlett Packard printer manual for detailed operating instructions.

The quality of a printed image depends on a combination of factors: correct media selection, printing software and raster imaging processor (RIP), shop conditions, etc.

The printers qualified to use this media have print mode options that are programmed specifically for these media. Current charts that show the various modes and printing dpi, and the quality results you can expect are available at www.hp.com under the website's support section. We recommend that you print the same image at all of these settings to determine acceptable print and productivity results.

The highest quality settings are usually desirable for backlit applications.

The correct media selection makes most other necessary adjustments to the printer.

- For the HP DesignJet CP 2000 or 3000 series printers, select the Opaque Vinyl UV setting.
- For the HP Designjet 5000 series printers, select the 3M Changeable UV setting or the HP Durable Gloss UV or HP Colorfast Vinyl setting.
- For the Z series printers, refer to HP's website or printer manuals.

Note: The HP printer settings lay down less ink per pass, which results in better ink absorption and quicker drying times.

- For the HP DesignJet CP 2000 or 3000 series printers, select the Opaque Vinyl UV setting.
- For the HP Designjet 5000 series printers, select the 3M Changeable UV setting or the HP Durable Gloss UV or HP Colorfast Vinyl setting.
- For the Z series printers, refer to HP's website or printer manuals.

Note: The HP printer settings lay down less ink per pass, which results in better ink absorption and quicker drying times.

### **Drying Guidelines**

Usually, the media can be laminated within 10 minutes after printing. However, especially in high humidity conditions, we recommend waiting 15 to 30 minutes before laminating.


Use care when handling graphics that have not been laminated to avoid scratching and abrasion.

Graphics made with this media and ink combination typically may be wound directly on a take-up roll after printing.

Whether or not you want a warranted graphic, an overlaminate is recommended to enhance durability, especially in outdoor applications.

#### **Overlaminate**

FIGURE 1 Typical Laminator Thread-up

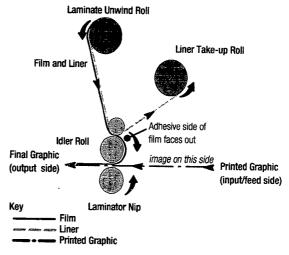

#### Creating a Laminated Overlap

Creating a laminated overlap helps ensure that the graphic does not peel or lift away from certain banner materials that may be subject to plasticizer migration. This method may also be used for flat, rigid or flexible sign applications.

- 1. Print the graphic as usual.
- 2. On all sides of the graphic, score the film only to the correct, final graphic dimension without cutting through the liner.

Weed away the excess film, leaving the bare liner exposed around the graphic. See FIGURE 2.

FIGURE 2 Trim and Weed Film Margin Only







Weed Margin

Laminate the graphic as usual (see page 5), making sure that at least one inch of the bare liner is covered by the laminate. See FIGURE 3.